



Earthing – Overhead lines



**3-Phase Earthing Device JSKL3-QL
with quick-lock-function
Low- and high voltage 0,4 – 52 kV
max 16,0 kA/1s**



The clamp can be fitted
in inclined angle to the
line!



**3-Phase Earthing Device
JSKL3-QL**
Line length: 1,0+2,5+2,5 m
Pole length: 1,3+1,5+1,3 m



**Voltage Detector
TAG 2020 F2**
3,6-7,2 + 12-36 kV



**1-Phase Earthing Device
JSKL1-JQL**
Recommended as down line to ground
When working without "0" line
Line length: 15 m
Pole length: 0,3 m

RAGNAR STÅLSKOG AB

Box 701, SE-194 27 Upplands Väsby, Sweden. Visitors address: Instrumentvägen 6
Tel: +46 8 594 211 80 Fax: +46 8 590 882 91 www.stalskog.se rs@stalskog.se


Earthing – Overhead lines

Earthing Device for overhead lines

in conformity with EN 61230 and EN 61235.

Operating Voltage 0,4 - 52 kV. Earthing Device with clamp **JSKL** is specially designed to a quick and easy application to overhead lines (diameter 1 - 25 mm). The clamp can be fitted in inclined angle to the line, which will extremely facilitate the application.

The Line Clamp JSKL-QL has a quick-lock-function, which makes the tightening in one turn.

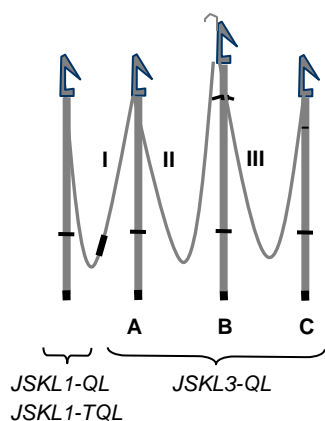

1-Phase Earthing Device
JK238-DXF

Suitable as down line to earth when there is no "0" conductor. The device is for connection to framework up to 30mm thick.



Rod Screw
DJS 1
For temporary grounding



1-Phase Earthing Device
JSKL1-QL
Line length 1,5 m
Pole length 1,3 m



1-Phase Earthing Device
JSKL1-TQL
(telescopic)
Line length 1,5 m
Pole length 2,2 m



Case
DFO/JSKL1-J



Case
DFO/JSKL3

No.	Type	Description	Cable area mm ²	Rated current kA/1s	Weight kg
*	JSKL3-QL	3-Phase Earthing Device	25 – 70	5,7 – 16,0	5,9 – 8,7 (incl. cable)
*	JSKL1-JQL	1-Phase Earthing Device	25 – 70	5,7 – 16,0	5,0 – 11,9 (incl. cable)
*	JK238-DXF	1-Phase Earthing Device	25 – 50	5,7 – 11,5	1,1 (excl. cable)
*	JSKL1-QL	1-Phase Earthing Device	25 – 70	5,7 – 16,0	1,5 – 2,1 (incl. cable)
*	JSKL1-TQL	1-Phase Earthing Device	25 – 70	5,7 – 16,0	1,7 – 2,3 (incl. cable)
E 16 595 50	DJS 1	Earthing Rod Screw			2,0
E 16 590 49	DFO/JSKL1-J	Case			0,5
E 16 589 49	DFO/JSKL3	Case			1,0
E 42 090 57	TAG 2020F2	Voltage Detector			

*) When ordering, earthing cable area and length must be specified.