



Earthing – Overhead lines



3-Phase Earthing Device JSKL3-TG
equipped with buttress thread
Low- and high voltage 0,4 – 52 kV
max 16,0 kA/1s



3-Phase Earthing Device JSKL3-TG
Line length: 1,0+2,5+2,5 m
Pole length: 1,3+1,5+1,3 m



The clamp can be fitted in inclined angle to the line!



Voltage Detector TAG 2020 F2
3,6-7,2 + 12-36 kV



1-Phase Earthing Device JSKL1-JTG
Recommended as down line to ground
When working without "0" line
Line length: 15 m
Pole length: 0,3 m

RAGNAR STÅLSKOG AB

Box 701, SE-194 27 Upplands Väsby, Sweden. Visitors address: Instrumentvägen 6
Tel: +46 8 594 211 80 Fax: +46 8 590 882 91 www.stalskog.se rs@stalskog.se

Earthing – Overhead lines

Earthing Device JSKL3-TG for overhead lines


In conformity with EN 61230

Operating Voltage 0,4 - 52 kV. Earthing Device with clamp **JSKL** is specially designed to a quick and easy application to overhead lines. (diameter 1 - 25 mm, Cu 10 mm²- FeAl 329 mm²).

The clamp can be fitted in inclined angle to the line, which will extremely facilitate the application.

The Line Clamp (JSKL-TG) is equipped with buttress thread, which makes the tightening with only few turns.

The C-rod is dividable to allow a voltage detector TAG 2000 to connected.

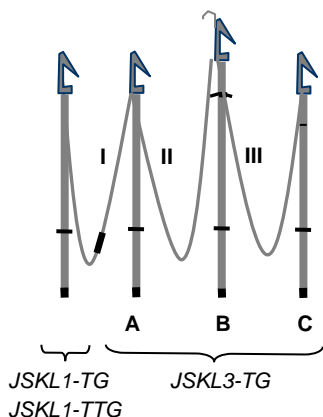

1-Phase Earthing Device JK238-DXF
Suitable as down line to earth when there is no "0" conductor. The device is for connection to framework up to 30mm thick.



Rod Screw DJS 1
For temporary grounding



1-Phase Earthing Device JSKL1-TG
Line length: 1,5 m
Pole length: 1,3 m



1-Phase Earthing Device JSKL1-TTG (telescopic)
Line length: 1,5 m
Pole length: 2,2 m



Case DFO/JSKL1-J



Case DFO/JSKL3

No.	Type	Description	Cable area mm ²	Rated current kA/1s	Weight kg
*	JSKL3-TG	3-Phase Earthing Device	25 – 70	5,7 – 16,0	5,9 – 8,7 (incl. cable)
*	JSKL1-JTG	1-Phase Earthing Device	25 – 70	5,7 – 16,0	5,0 – 11,9 (incl. cable)
*	JK238-DXF	1-Phase Earthing Device	25 – 50	5,7 – 11,5	1,1 (excl. cable)
*	JSKL1-TG	1-Phase Earthing Device	25 – 70	5,7 – 16,0	1,5 – 2,1 (incl. cable)
*	JSKL1-TTG	1-Phase Earthing Device	25 – 70	5,7 – 16,0	1,7 – 2,3 (incl. cable)
E 16 595 50	DJS 1	Earthing Rod screw			2,0
E 42 090 57	TAG 2020F2	Voltage Detector			0,3
E 16 590 49	DFO/JSKL1-J	Case			0,4
E 16 528 76	DFO 117	Case			1,0

*) When ordering, earthing cable area and length must be specified.